



Specifications



EPXM-N0, -N2, -N3, -P0, -P2, -P3, -V0, -V2, -V3, -X0, -X2 and -X3

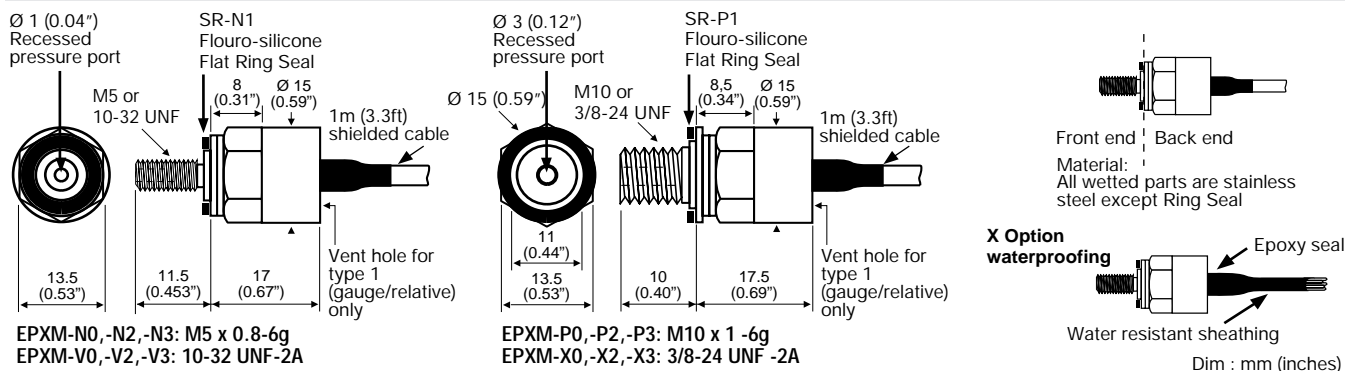

EPXM-N4, -N6, -N7, -P4, -P6, -P7, -V4, -V6, -V7, -X4, -X6 and -X7

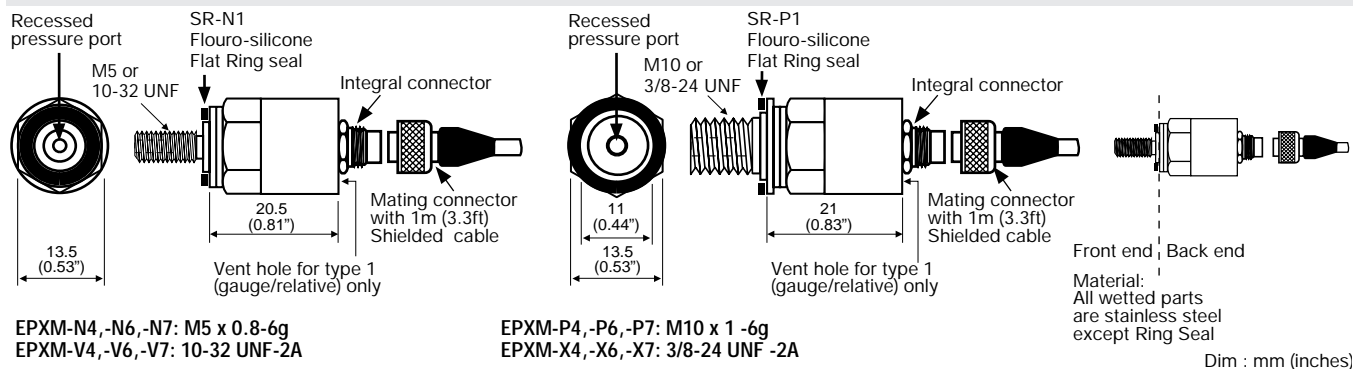

EPXM Series

PSI RANGES "FS" (Note 1)	BAR RANGES "FS" (Note 1)	PRESSURE LIMIT	RESONANT FREQUENCY nom. (Note 2)	OUTPUT "FSO" nom. (Note 3)	CNL&H (%FSO)	THERMAL ZERO SHIFT /50°C (/100°F)
150	10	1.5XFS	30 KHz	9 mV or 5V	± 3/4 %	± 1/2 % FSO
200	15	1.5XFS	45 KHz	9 mV or 5V	± 3/4 %	± 1/2 % FSO
300	20	1.5XFS	50 KHz	9 mV or 5V	± 1/4 %	± 1/2 % FSO
500	35	1.5XFS	65 KHz	9 mV or 5V	± 1/4 %	± 1/2 % FSO
1000	70	1.5XFS	95 KHz	9 mV or 5V	± 1/4 %	± 1/2 % FSO
1500	100	1.5XFS	110 KHz	9 mV or 5V	± 1/4 %	± 1/2 % FSO
2000	150	1.5XFS	130 KHz	9 mV or 5V	± 1/4 %	± 1/2 % FSO
3000	200	1.5XFS	150 KHz	9 mV or 5V	± 1/4 %	± 1/2 % FSO
5000	350	1.5XFS	190 KHz	9 mV or 5V	± 1/4 %	± 1/2 % FSO

Notes: ¹ Vented (gauge/relative), Sealed or Absolute Pressure References 1, 2 or 3. Temperatures expressed in °F for PSI Ranges and °C for BAR Ranges. ² Resonant Frequency for sensor's diaphragm within the pressure port cavity. Useful frequency is a function of cavity resonance and thereby suitable for static and low frequency use only. ³ FSO is 9 mV nom. for types N0, N4, P0, P4, V0, V4, X0, X4; 5V nom. on all others.

EXCITATION: N0, N4, P0, P4, V0, V4, X0 & X4=5VDC; N2, N6, P2, P6, V2, V6, X2 & X6=±15VDC
 N3, N7, P3, P7, V3, V7, X3 & X7=28VDC (24-32VDC)

ELECTRICAL IN: N0, N4, P0, P4, V0, V4, X0 & X4=1KΩ nom. All except N0, N4, P0, P4, V0, V4, X0 & X4=15mA max.

ELECTRICAL OUT: All except N2, N6, P2, P6, V2, V6, X2 & X6=1KΩ nom. N2, N6, P2, P6, V2, V6, X2 & X6=<1Ω

CE CONFORMANCE: EN 61010-1, EN 50081-1, EN 50082-1

NON-REPEATABILITY: ±0.1% FSO

THERMAL SENSITIVITY SHIFT (TSS): ±1/2%/50°C (±1/2%/100°F)

OPERATING TEMPERATURE: -40°C to 125°C (-40°F to 257°F) or 220°C (428°F) on N0, P0, V0 or X0 with option Z36 or Z38

COMPENSATED TEMPERATURE: 0°C to 60°C (32°F to 140°F)

ZERO OFFSET AT 21°C (70°F): ±5% FSO typ.

PRESSURE REFERENCES:
 1 = Vented (gauge/relative)
 2 = Sealed at 1 atmosphere
 3 = Absolute (Zero offset to 0 pressure absolute)

Entran®



TITLE
EPXM PRESSURE SENSORS
High Stability-Stainless Steel
Recessed Diaphragm

Entran Devices, Inc.
 FAIRFIELD, NJ, USA

SPECIFICATION NUMBER	ISSUE	PAGE
EPXMS001U	PB0	1 of 2

Options and Accessories:

COMPENSATED TEMPERATURE RANGES:

STANDARD	=	0°C to 60°C (32°F to 140°F)
Z0	=	-40°C to 20°C (-40°F to 70°F)
Z02	=	-40°C to 60°C (-40°F to 140°F)
Z35	=	20°C to 120°C (70°F to 248°F)
Z36	=	20°C to 150°C (70°F to 300°F) on type N0,P0,V0 & X0 only.
Z38	=	20°C to 200°C (70°F to 390°F) on type N0,P0,V0 & X0 only.
Z*	=	Non-standard, contact Entran

EXCITATION VOLTAGE:

V*	=	Non-standard Excitation and FSO, contact Entran.
----	---	--

SPECIAL CABLE LENGTH:

L00F	=	Replace "00" with total length in feet.
L00M	=	Replace "00" with total length in meters.

WATERPROOFING CABLE EXIT FOR

EPXM-N0, -N2, -N3, -P0, -P2, -P3, -V0, -V2, -V3, -X0, -X2 & -X3 WITH PRESSURE REFERENCE TYPE 2 OR 3 ONLY:

X	=	Short term waterproofing.
---	---	---------------------------

CONNECTOR WIRED TO CABLE:

C	=	Microtech type male (w/o mate)
RS	=	RJ Telephone type male (w/o mate)

MATING CONNECTORS FOR CONNECTOR OPTIONS:

See Cable and Connector Bulletins

EXTRA RING SEALS FOR EPXM:

SR-N1 = Flouro-Silicone	SR-N2 = Viton
SR-P1 = Flouro-Silicone	SR-P2 = Viton

北京赛斯维测控技术有限公司

北京市朝阳区望京西路48号

金隅国际C座1002

电话：+86 010 8477 5646

传真：+86 010 5894 9029


邮箱：sales@sensorway.cn

<http://www.sensorway.cn>

Model Number construction:

EPXM Series	-	N0 Body	1 Reference	-	150 Range	B Units	-	/RS/L3M/Z0 Options
		N0 P0 V0 X0	1		(K used for 1000 Ex: 1K)	B = BAR P = PSI		C or RS L00F or L00M V* X Z0, Z02, Z35 or Z* (Z36 or Z38 on N0,P0,V0 & X0)
		N2 P2 V2 X2	2					
		N3 P3 V3 X3	3					
		N4 P4 V4 X4						
		N6 P6 V6 X6						
		N7 P7 V7 X7						

Installation:

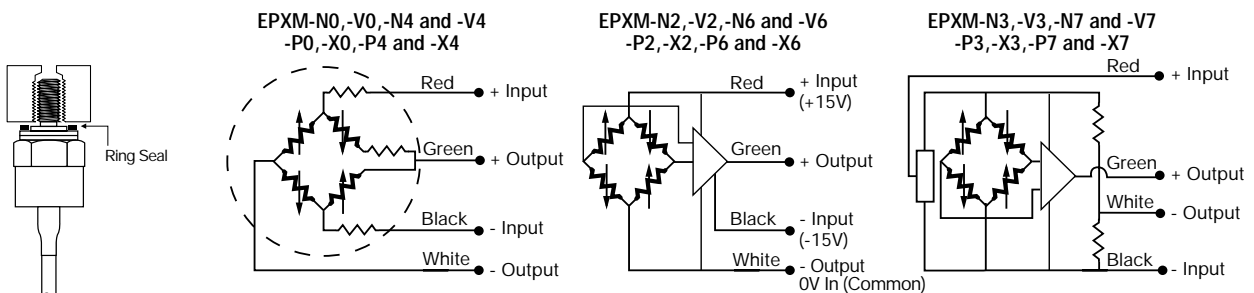

Recommended installation torque :

For all pressure range: 1m.N (8 In-Lbs)

It is recommended that "0V COMMON" of the power supply be grounded if consistent with proper operation of the instrumentation system.

Common mode output voltage of +2V nom. referred to -Input

	EPXM PRESSURE SENSORS	SPECIFICATION NUMBER	ISSUE	PAGE
		EPXMS001U	PB1	2 of 2